

WICANDERS

**Everyday comfort.
Lifetime performance.**

AMORIM CORK FLOORING

Created by Humans,
Inspired by Nature



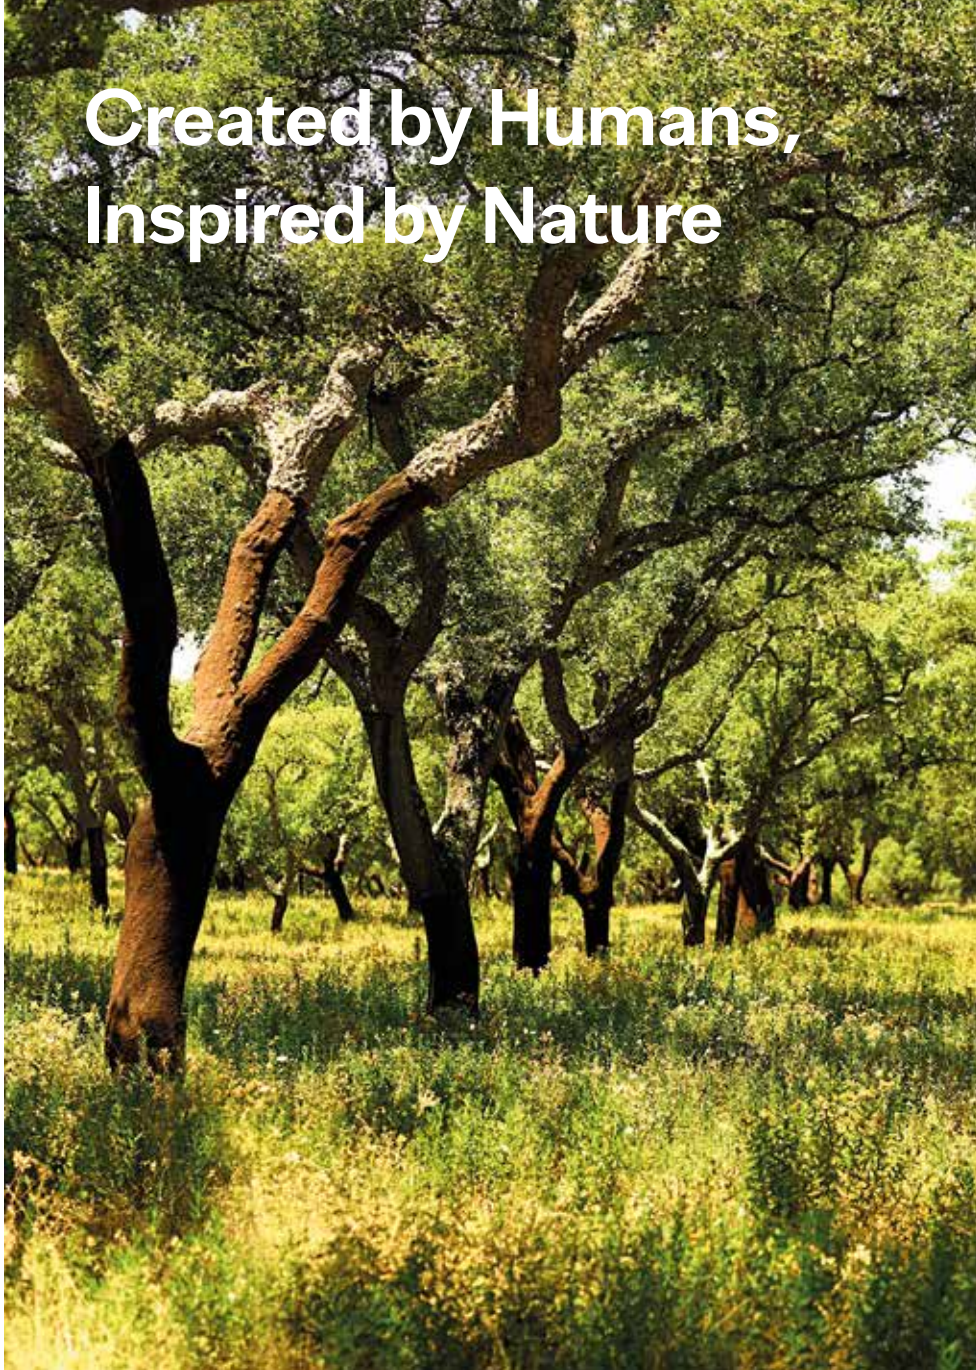

WICANDERS

Wicanders has a legacy that goes back to 1868. It is part of Amorim Cork Flooring, the global leading brand in cork-based flooring, present in more than 80 countries worldwide. Its promise is to provide Floors for Living, ready for real life, for our home and office, for our different rhythms, for our family and pets. For all those wonderful and simple, yet sometimes unexpected moments, thanks to Wicanders durability and **performance**.

Over the years, Wicanders has developed sustainable flooring with exclusive properties due to its cork benefits. By combining state of the art technology with the exclusive natural properties of cork, a higher standard of **comfort** in flooring is achieved. Available with cork, wood and stone looks, its products are able to provide a silent and thermally insulated environment that endures impacts and is very comfortable to walk and stand on.

**Wicanders means
everyday comfort, lifetime performance.**

AMORIM CORK FLOORING

An aerial photograph showing a large body of water on the left, transitioning into a grassy bank on the right. The bank is dotted with several trees, and their shadows are cast onto the ground. The water is a deep blue, and the grass is a mix of green and brown, suggesting a natural, somewhat arid environment.

CORK: Inspired by Nature

Inspired by Nature, Wicanders represents a unique balance between the creation of innovative products and the protection of the environment.

One of cork's most extraordinary properties can be found in its biological origins. In fact, extracting cork does not harm the tree from which it comes from. It is removed every nine years, and not a single tree is cut down in the process.

Cork is the outer bark of the cork oak tree (*Quercus suber* L.), a slowly growing tree from the Mediterranean with a lifespan of around 200 years and plays a central role in the environmental, economic and social development of this region.

With unique properties, cork is 100% natural and fully biodegradable, renewable and recyclable.



Sustainable by heart

ENVIRONMENT



No Trees are damaged or cut down during the harvesting

The extraction of cork and its related industries are remarkably sustainable. This is because the tree is never cut down or damaged during the extraction process and the bark regenerates itself after each harvesting.



Positive ecological impact

For each ton of cork produced, the cork oak forest retains up to 73 tons of CO₂, helping to reduce Global Warming Potential (GWP).

ECONOMY



Rural areas economic engine

The cork oak forest is essential for the economic development of rural areas in the Mediterranean region, by creating jobs and activities related to the harvesting and treatment of cork. WWF estimates that more than 100,000 people are economically dependent of cork-related business activities.



One of the highest paid agricultural jobs

Cork harvesting is an activity that requires experience and high skills, to prevent damaging the tree during the process. Therefore this activity is one of the highest paid agricultural job in the world.

SOCIAL



Crossing generations

More than a job, harvesting is a handcraft work that requires a deep knowledge of the forest and the technique. Thus to be able to perform this activity takes several years of training, a know-how that crosses family generations.



Prevent rural desertification

Cork harvesting is a regular and cyclical process, creating a continuous activity that contributes to settle people in areas at risk of desertification.

200 YEARS

The average lifespan of a cork oak tree.

100.000

Direct and indirect jobs are created by the cork industry.

9 YEARS

The period of time between each cork oak harvesting.

NO TREES ARE DAMAGED

Or cut down.

CORK HARVESTING


Is one of the highest paid agricultural job in the world.

From Nature, to your special space.

Our products are designed to resist under the toughest conditions, always with incredible stability and exceptional **performance**.


Cork offers a world of **comfort** to be discovered by your feet.

WALKING SOUND



Silence

Reduces the walking sound up to 53%.

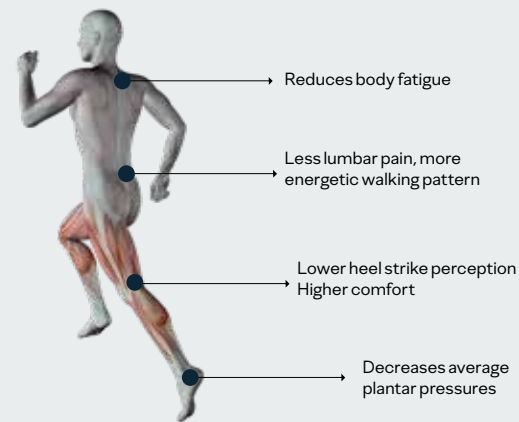

Walking Comfort

Wicanders cork floors are the perfect mix to reduce heel strike impacts and related body tensions, but stable enough to help the foot impulse and provide the needed stability to reduce effort on walking and decrease body fatigue.



Impact Resistance

Highest shock absorbing performance.





Indoor Air Quality


Compliance with the strictest indoor air quality standards after being tested on over 2000 potential chemicals.



Natural Thermal Insulation

Optimal floor temperature all year round.

INFRARED FOOT TEMPERATURE

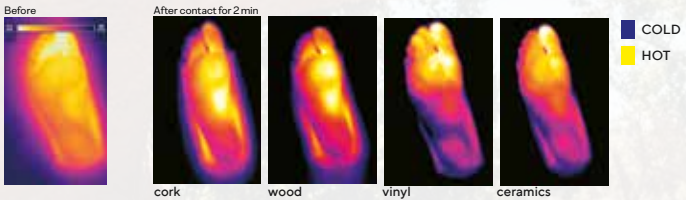

cork

Go	10
Essence	16

wood

Go	28
Resist	38
Infinitus	44
Resist ECO	48
Essence	56
Hydrocork	64

stone

Essence	77
---------	----



cork

A world of solutions
at your feet.

cork Go

Formats 905 x 295 x 10,5 mm
35 5/8 x 11 5/8 x 3/8"



Developed to be an easy and practical floor with the unique beauty of timeless cork designs that gives a seamless look to the floor. A sustainable product that is ideal for residential use. Cork Go takes advantage of the thermal and accoustical benefits of cork while providing ease of maintenance and outstanding comfort when walking barefoot.



Dream



GB05003

Dream

80001642

905 x 295 x 10,5mm



NEW

MF01003

Earth Tones Grit

80002131

905 x 295 x 10,5mm



GB09002

Impulse

80001645

905 x 295 x 10,5mm



C87Y001

Serenity

80001286

905 x 295 x 10,5mm



NEW

MF02002

Earth Tones Sand

80002133

905 x 295 x 10,5mm



C87V001

Affection

80001283

905 x 295 x 10,5mm



GB01003

Charm

80001636

905 x 295 x 10,5mm



GB10002

Appeal

80001646


905 x 295 x 10,5mm



MF03003
Earth Tones Mud
80002135
905 x 295 x 10,5mm



C87X001
Gloomy
80001285
905 x 295 x 10,5mm

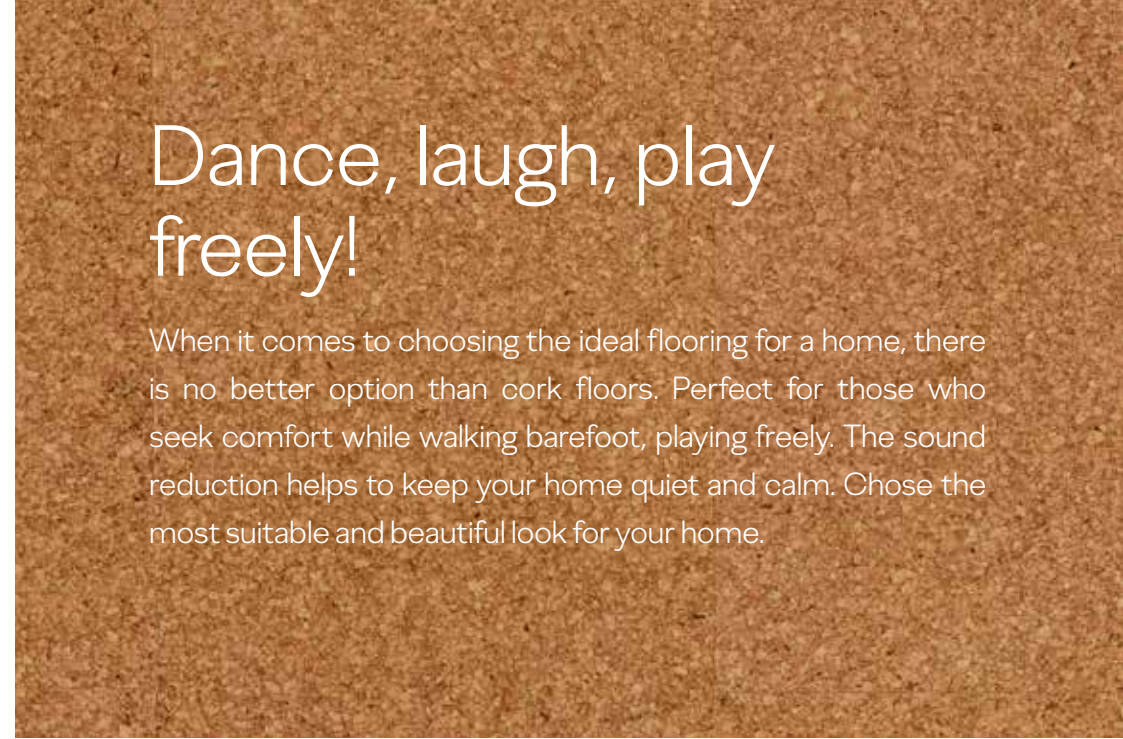

Dance, laugh, play
freely!

When it comes to choosing the ideal flooring for a home, there is no better option than cork floors. Perfect for those who seek comfort while walking barefoot, playing freely. The sound reduction helps to keep your home quiet and calm. Chose the most suitable and beautiful look for your home.



C87W001
Addict
80001284
905 x 295 x 10,5mm



GB06002
Ambition
80001643
905 x 295 x 10,5mm



GA01002
Moment
80001631
905 x 295 x 10,5mm



GA21003
Desire
80001633
905 x 295 x 10,5mm



C824001

Captivation

80001219

905 x 295 x 10,5mm



C8D2001

Blase

80001298

905 x 295 x 10,5mm

Desire



C822001
Whim
80001218
905 x 295 x 10,5mm



GB03002
Attraction
80001640
905 x 295 x 10,5mm



MF05003
Earth Tones Argil*
80002139
905 x 295 x 10,5mm



GB02002
Allure
80001638
905 x 295 x 10,5mm



MF06002
Earth Tones Soil
80002141
905 x 295 x 10,5mm



MF04003
Earth Tones Concrete
80002137
905 x 295 x 10,5mm



Earth Tones Argil

*minimum order quantity: 250 m²

Technical solution


PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 2,6MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 0,8MM

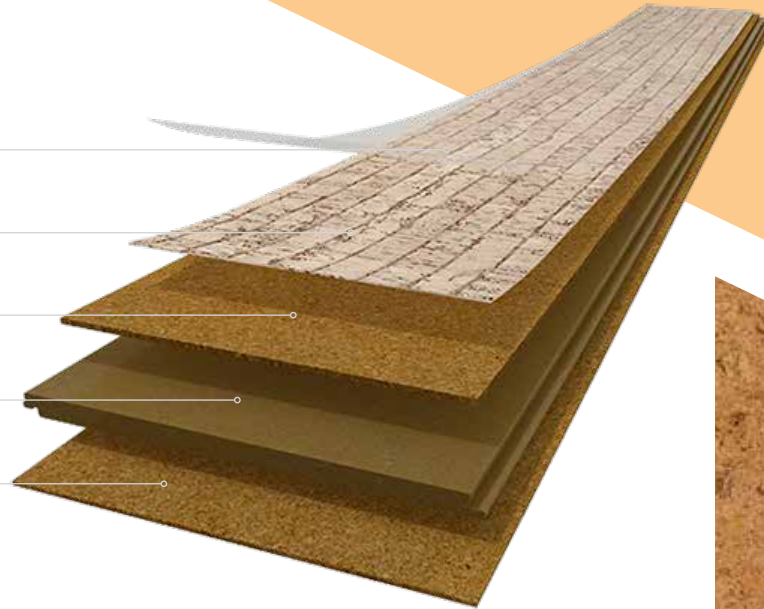

Finishing & Warranty



XtraMatt surface has a unique natural look and feel, combined with the resistance and performance of a UV finish, focused on environmental friendly properties and ease of maintenance.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



O Blue Angel é uma certificação voluntária que segue padrões ambientais rigorosos e é reconhecida como um guia de referência para um modo de vida mais sustentável. Blue Angel é sinónimo de produto (ou serviço) que atende a rigorosos critérios de desempenho ambiental, como ser livre de PVC.



In 2003 Japan has adopted regulations that limit formaldehyde emissions of buildings products, in order to improve indoor air quality. So that products can be sold in Japan, they must have the classification ranging from F4 stars (extremely low emissions) to F3 stars (low emissions), but in this case with some restrictions.



7 POINTS



8 POINTS (UPON REQUEST)

cork Essence

Formats
905 x 295 x 10,5 mm
35 5/8 x 11 5/8 x 3/8"
1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"



Rich in style, charm and sophistication, cork Essence expresses its personality through the unique designs and formats aligned with modern interior design trends. In harmony with nature, each board is unique. The ideal floor for creating ambiances full of charm, combined with the unique comfort of cork and the performance requirements of residential and light commercial applications.



Fashionable Glacier



C85J001
Fashionable Glacier
 80001244
 905 x 295 x 10,5mm



I801002
Identity Moonlight
 80001650
 905 x 295 x 10,5mm



P801002
Personality Moonlight
 80002260
 905 x 295 x 10,5mm



C83R002
Lane Timide *
 80001224
 1220 x 185 x 10,5mm **4M**



P802002
Personality Timide
 80002262
 905 x 295 x 10,5mm



C88N001
Fashionable Jasmim *
 80001289
 905 x 295 x 10,5mm





C810003

Linn Blush

80001212

905 x 295 x 10,5mm



C81N002

Linn Moon

80001211

905 x 295 x 10,5mm



Fashionable Grafite

When Nature meets charm

In modern interior design, the creation of spaces with style and personality starts with beautiful and expressive floors. Aligned with the market trends, our team of experts has created a unique collection that combines different shapes of natural Cork.

Rich in style, charm and sophistication, and in harmony with nature, this collection also provides a sense of wellbeing that will make more pleasant getting together with friends and family.



I803002
Identity Silver
 80001652
 905 x 295 x 10,5mm



C88K001
Fashionable Antique White *
 80001288
 905 x 295 x 10,5mm



I802002
Identity Timide
 80001651
 905 x 295 x 10,5mm



C85L001
Fashionable Cement
 80001246
 905 x 295 x 10,5mm



C88Q001
Fashionable Antracite *
 80001292
 905 x 295 x 10,5mm



C85M001
Fashionable Grafite
 80001247
 905 x 295 x 10,5mm

* minimum order quantity: 250 m²



I810002

Identity Tea

80001657

905 x 295 x 10,5mm



P810002

Personality Tea

80002266

905 x 295 x 10,5mm



C85N001

Fashionable Macchiato

80001249

905 x 295 x 10,5mm



C88P001

Fashionable Marfim *

80001291

905 x 295 x 10,5mm



P805002

Personality Champagne

80002263

905 x 295 x 10,5mm



I805002

Identity Champagne

80001653

905 x 295 x 10,5mm



C8G2001

Novel Edge Natural

80001300

905 x 295 x 10,5mm



O824003

Originals Shell

80002239

905 x 295 x 10,5mm



O801007

Originals Natural

80002234

905 x 295 x 10,5mm



C84M001

Traces Tea *

80001239

1220 x 185 x 10,5mm



Novel Edge Natural



O84N001

Traces Spice *

80001240

1220 x 185 x 10,5mm



O830003

Originals Symphony

80002241

905 x 295 x 10,5mm



O821005

Originals Harmony

80002236

905 x 295 x 10,5mm



O841002

Originals Accent

80002243

905 x 295 x 10,5mm



Traces Chestnut



O849003
Originals Dawn
80002244
905 x 295 x 10,5mm



O822002
Originals Character
80002238
905 x 295 x 10,5mm



C83S003
Lane Chestnut *
80001227
1220 x 185 x 10,5mm 4M



C85R002
Traces Chestnut *
80001252
1220 x 185 x 10,5mm 4M



P832002

Personality Chestnut

80002268

905 x 295 x 10,5mm



I832002

Identity Chestnut

80001662

905 x 295 x 10,5mm



I821002

Identity Nightshade *

80001660

905 x 295 x 10,5mm



Identity Chestnut

Technical solution


PROTECTIVE SURFACE

GENUINE CORK VENEER

AGGLOMERATED CORK 2,6MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 0,8MM

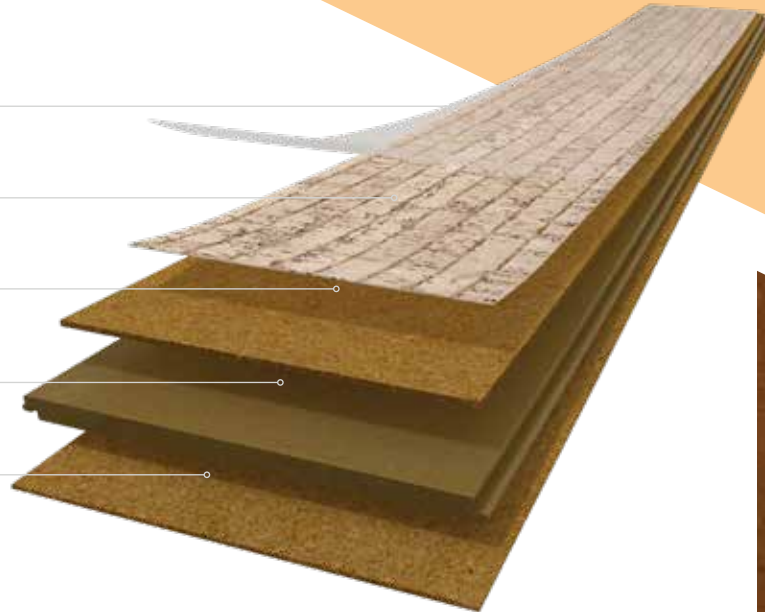

Finishing & Warranty



XtraMatt+ surface is a High Resistance Acrylic UV finish suitable for residential and light commercial areas. It enhances the natural beauty and environmental friendly properties of cork floors, while assuring a high performance for a long time.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



The goal of the German Cork Association is to assure the quality of cork products, as well as the optimization of manufacturing processes and the support of research projects.



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



Blue Angel is a voluntary certification that follows strict environmental standards and is recognized as a reference guide for a more sustainable way of life. Blue Angel is synonymous with a product (or service) that meets strict environmental performance criteria, such as being PVC-free.



In 2003 Japan has adopted regulations that limit formaldehyde emissions of buildings products, in order to improve indoor air quality. So that products can be sold in Japan, they must have the classification ranging from F4 stars (extremely low emissions) to F3 stars (low emissions), but in this case with some restrictions.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



7 POINTS



8 POINTS (UPON REQUEST)

Technical Data Sheet

	Standard	Unit	cork Go	cork Essence
Dimension (LxWxT)	-	-	905x295x10,5mm	905x295x10,5mm 1220x185x10,5mm
Mass per unit	-	Kgs / m ²	7,68	7,68
Packaging (box / pallet)	-	m ²	2,136 / 111,072	2,136 / 111,072 - 905x295x10,5mm 1,806 / 79,464 - 1220x185x10,5mm
Level of use Domestic	ISO 10874	Class	23	23
Level of use Commercial	ISO 10874	Class	-	31
General properties - EN 12104 - EN 20326				
Thickness, t -	EN ISO 24346	± 0,25	Complies	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies	Complies
Squareness, q	EN ISO 24342	< 0,2	Complies	Complies
Straightness, s	EN ISO 24342	≤ 0,30	Complies	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies	Complies
Dimensional Stability	ISO 20326 (Anex C)	≤ 0,25 %	Complies	Complies
Classification properties - EN 12104 - EN 20326				
Wear resistance IP	EN 14354 (Annex D)	≥ 1 000 cycles	Complies	-
		≥ 2 500 cycles	-	Complies
Castor chair resistance	ISO 4918	25 000 cycles	Complies	Complies
Simulated movement of a furniture leg	Visual	No damage shall be visible after testing with a foot type 2	Complies	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,4 mm	Complies	-
		≤ 0,3 mm	-	Complies
Swelling	ISO 24336	≤ 20%	Complies	-
		≤ 18%	-	Complies
Safety properties - EN 14041				
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1 : Class EN 13501-1	Class	Dfl-s1	C fl-s1
Slip Classification	EN 13893	Class	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable	Undetectable
Additional properties				
Impact sound reduction	EN ISO 10140	dB (Δ Lw)	16	16
Walking noise	IHD-W431	dB %	13,2 51,6	13,2 51,6
Thermal resistance (Thermal conductivity)	EN ISO 10456	m ² K/W	R ≤ 0,150	R ≤ 0,150



wood

Be different

Stay in your comfort zone.

wood Go

Formats 1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"



Floating floor with classic wood visuals and a multilayer cork structure for added performance in terms of thermal and acoustic insulation.

This practical solution is ideal for those who like the beauty of wood combined with an easy to maintain and scratch resistant surface.



Washed Moon Oak



B0VM001
Washed Moon Oak
 80000582
 1220 x 185 x 10,5mm



LJN2001
Ivory Salt Oak
 80001950
 1220 x 185 x 10,5mm



B0N9001
Frozen Oak
 80000521
 1220 x 185 x 10,5mm



LJW3001
Quartz Larch
 80002092
 1220 x 185 x 10,5mm



LJUX001
Oak Light Gris
 80002055
 1220 x 185 x 10,5mm



LJVZ001
Oak Modern Gris
 80002090
 1220 x 185 x 10,5mm



LJN3001
Storm Oak
 80001953
 1220 x 185 x 10,5mm



wood Go



B0VI001

Pastel Oak

80000579

1220 x 185 x 10,5mm



B0VB001

Argent Oak

80000577

1220 x 185 x 10,5mm



Washed Tundra Oak



Argent Oak



BOVP001
Washed Desert Oak
80000583
1220 x 185 x 10,5mm



BOVK001
Washed Tundra Oak
80000581
1220 x 185 x 10,5mm



LJR9004
Polar Nature Oak
80002012
1220 x 185 x 10,5mm



LJWB001
Limed White Rustic Oak
80002098
1220 x 185 x 10,5mm



LJW6001
Old Larch
80002094
1220 x 185 x 10,5mm



LJUY001
Oak Light Nature
80002057
1220 x 185 x 10,5mm





LJUZ001
Oak Nature
80002059
1220 x 185 x 10,5mm



LJWA001
Oil Taupe Oak
80002097
1220 x 185 x 10,5mm



LJN4001
Hard Oak
80001957
1220 x 185 x 10,5mm



LJS0005
Fall Pine
80002020
1220 x 185 x 10,5mm



LJS1004
Highland Pine
80002028
1220 x 185 x 10,5mm



LJS2004
Classic Cherry *
80002034
1220 x 185 x 10,5mm





Oil Taupe Oak



LJN6001
Savan Limed Oak
80001961
1220 x 185 x 10,5mm



BOVC001
Linen Oak
80000578
1220 x 185 x 10,5mm



BOQ0003
Alaska Oak
80000537
1220 x 185 x 10,5mm



LJN5001
Limed Oak
80001959
1220 x 185 x 10,5mm



LJY6001
Oak Rustic
80002109
1220 x 185 x 10,5mm



LJW5001
Natural Larch
80002093
1220 x 185 x 10,5mm



Chalk Oak



B0WX001
Caribbean Oak
80000592
1220 x 185 x 10,5mm



B0VJ001
Almond Oak
80000580
1220 x 185 x 10,5mm



B0Q1003
Chalk Oak
80000538
1220 x 185 x 10,5mm



LJS5005
Indian Dark Oak
80002045
1220 x 185 x 10,5mm



LJN1001
Honey Oak
80001949
1220 x 185 x 10,5mm



LJS3005
Classic Nature Oak
80002037
1220 x 185 x 10,5mm



LJWC001
Rustic Taupe Oak
80002100
1220 x 185 x 10,5mm



LJS4005
Shield Oak *
80002040
1220 x 185 x 10,5mm



B009001
Light Sucupira
80000526
1220 x 185 x 10,5mm

Honey Oak

* minimum order quantity: 250 m²

Technical solution

PROTECTIVE WEAR LAYER


HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

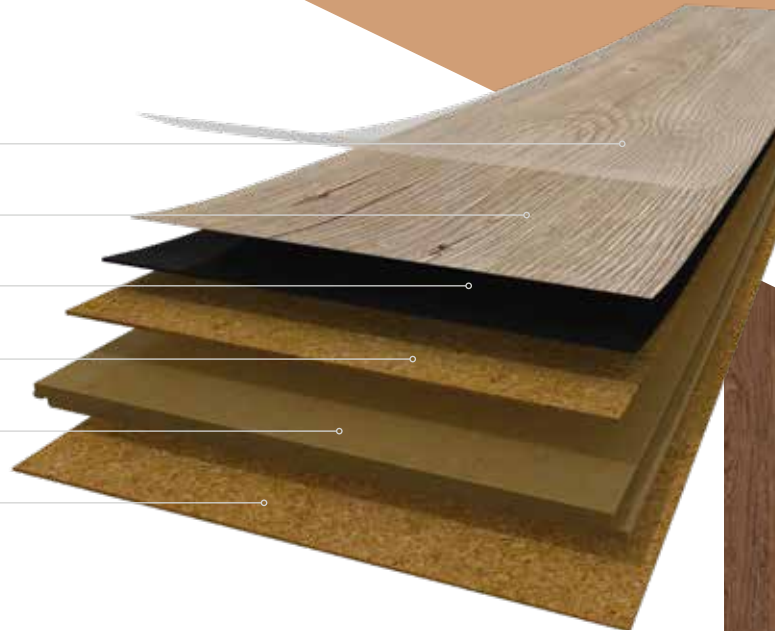

Finishing & Warranty



Suitable for heavy traffic residential areas and moderate traffic commercial areas.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



7 POINTS



8 POINTS (UPON REQUEST)

wood Resist

Formats 1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"



Design to resist in high traffic commercial areas, this floating floor solution is easy to install, absorbs subfloor irregularities and delivers an excellent technical performance. The wood visuals with traditional patterns are the best choice for those who want spaces full of class, but with the unmatched comfort of cork and a worry free heavy duty surface.





BOR0001
Linen Cherry
80000543
1220 x 185 x 10,5mm



BOR1001
Sand Oak
80000544
1220 x 185 x 10,5mm



BOV4001
Nordic Ash
80000571
1220 x 185 x 10,5mm



BOWR001
Wheat Oak
80000590
1220 x 185 x 10,5mm



4 sides beveled



Linen Cherry



Sawn Bisque Oak



BOT7001

Limed Grey Oak

80000562

1220 x 185 x 10,5mm



BOP3001

Sawn Bisque Oak

80000530

1220 x 185 x 10,5mm



4 sides beveled



BOR3001
Wheat Pine
 80000545
 1220 x 185 x 10,5mm



BOWT001
Arcadian Artic Pine *
 80000591
 1220 x 185 x 10,5mm

Creating solutions. Reinventing comfort.

When choosing the perfect tone to complement your special space, Wicanders has all the solutions to match your personal style, while enduring the test of time.

Wicanders products are impact resistant and acoustical and thermal insulators, providing a sense of well-being.



B0U0001
Rustic Limed Gray Oak
 80000564
 1220 x 185 x 10,5mm



BOP2001
Sawn Twine Oak
 80000529
 1220 x 185 x 10,5mm



BOP4001
Arcadian Soya Pine
 80000531
 1220 x 185 x 10,5mm



Limed Grey Oak

* minimum order quantity: 250 m2



Nature Oak



BOT5001

Nature Oak

80000560

1220 x 185 x 10,5mm



BOR4001

Elegant Oak

80000546

1220 x 185 x 10,5mm



BOP5001

Arcadian Rye Pine

80000532

1220 x 185 x 10,5mm



BOP0001

Castle Raffia Oak

80000527

1220 x 185 x 10,5mm

Technical solution

PROTECTIVE WEAR LAYER


HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK 1,5MM

HDF - HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

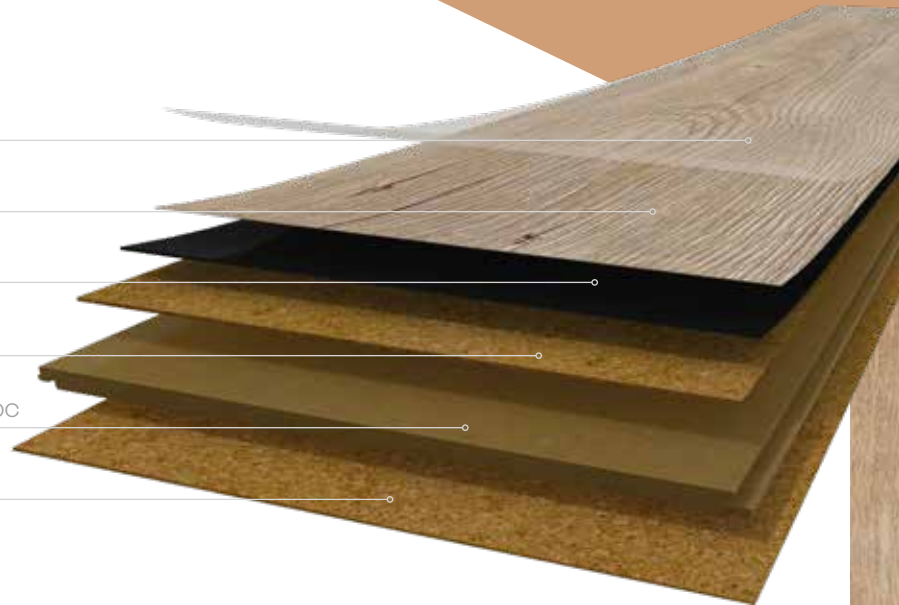

Finishing & Warranty



Suitable for heavy traffic residential areas and heavy traffic commercial areas.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



wood *Infinitus*

Formats 1840 x 220 x 8 mm
72-7/16x8-21/32x5/16"



The ultimate waterproof product that combines Resistance, Performance and Design. Long and wider planks with wood designs, Infinitus will give your space a distinguished and contemporary look. Infinitus is an optimal choice for renovation projects, as it requires minimum subfloor preparation, is also a low thickness product and is suitable for high traffic commercial areas. Performed with 5Gi easy installation system for a flawless floor laying, Infinitus is the perfect fusion of performance and design.



Grey Majestic Oak



B4TE001
Grey Majestic Oak
80000604
1840 x 220 x 8mm



B4TI001
Colossal Shadow Oak
80000608
1840 x 220 x 8mm



B4TH001
Colossal Light Oak
80000607
1840 x 220 x 8mm



B4TF001
Prodigy Bright Oak
80000605
1840 x 220 x 8mm



B4TA001
Smooth Solid Oak
80000600
1840 x 220 x 8mm



B4TG001
Prodigy Pearl Oak
80000606
1840 x 220 x 8mm



B4TB001
Light Majestic Oak
80000601
1840 x 220 x 8mm



Natural Majestic Oak



B4TC001

Natural Majestic Oak 4M

80000602

1840 x 220 x 8mm



B4TD001

Brown Majestic Oak 4M

80000603

1840 x 220 x 8mm

4M

4 sides beveled

Technical solution

PROTECTIVE WEAR LAYER

WOOD HIGH RESOLUTION IMAGE

SPC CORE

INTEGRATED CORK UNDERLAY 1,5MM



Finishing & Warranty



Suitable for heavy traffic residential areas and heavy traffic commercial areas.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



7 POINTS



8 POINTS (UPON REQUEST)

wood Resist ECO

Formats 1220 x 185 x 10,5 mm
48 x 7 1/4 x 3/8"



Resist Eco is a PVC free surface available in an extensive collection of wood visuals. Designed to withstand the needs of our daily lives and commercial areas due to its wear resistance and indoor air quality credentials. The cork top layer gives the product an outstanding comfort, while reducing the walking sound. The perfect combination between the beauty of wood and the performance, stability, comfort and ease of maintenance.



Redwood Forest Oak



FDYW001

Glacial Pine 4M

80001627
1220 x 185 x 10,5mm



FDYX001

Gold Coast Oak 4M

80001628
1220 x 185 x 10,5mm



FDX5001

Mount Logan Oak 4M

80001610
1220 x 185 x 10,5mm



FDYF001

Ocean Oak 4M

80001619
1220 x 185 x 10,5mm



FDYU001

Castle Mountain Oak 4M

80001625
1220 x 185 x 10,5mm



FDYI001

Diamond Oak 4M

80001621
1220 x 185 x 10,5mm



FDYY001

California Chestnut 4M

80001629
1220 x 185 x 10,5mm





Rain Forest Oak

There is no place like home.

Flooring is one of the most important decisions when decorating a space. The colour and style you choose for the floor will set the tone for the whole ambiance, reflecting your personality and your style.

These looks will layer up your working space with organic warmth that feels both fresh and real, light and grounded.



FDX7001

Rain Forest Oak 4M
80001612
1220 x 185 x 10,5mm



FDYD001

Royal Oak 4M
80001617
1220 x 185 x 10,5mm



4 sides beveled



Royal Oak



NEW

FDY7001

Redwood Forest Oak 4M

80001613

1220 x 185 x 10,5mm



NEW

FDX6001

Mount Fuji Oak 4M

80001611

1220 x 185 x 10,5mm

4M

4 sides beveled



Mountain Oak



FDY8001

Mount Everest Oak 4M

80001614

1220 x 185 x 10,5mm



Mocca Oak



FDYA001

Mountain Oak 4M

80001615

1220 x 185 x 10,5mm

4M

4 sides beveled



FDYB001
Sprucewood 4M
 80001616
 1220 x 185 x 10,5mm



FDYG001
Field Oak 4M
 80001620
 1220 x 185 x 10,5mm



FDYE001
Manor Oak 4M
 80001618
 1220 x 185 x 10,5mm



FDYL001
Mocca Oak 4M
 80001623
 1220 x 185 x 10,5mm

4M 4 sides beveled



Manor Oak



Black Forest Oak



Quartz Oak



FDYM001

Quartz Oak 4M

80001624

1220 x 185 x 10,5mm



NEW

FDYV001

Black Forest Oak 4M

80001626

1220 x 185 x 10,5mm



FDYK001

Dark Onyx Oak 4M

80001622

1220 x 185 x 10,5mm

4M

4 sides beveled

Technical solution

PVC-FREE PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE FILM

AGGLOMERATED CORK 1,2MM

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 2,2MM



Finishing & Warranty



Suitable for heavy traffic residential areas and heavy traffic commercial areas.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT-product Interior brand is a voluntary, independent label for VOC-emission and quality of floorings. The results comply with the emission thresholds of AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



7 POINTS



8 POINTS (UPON REQUEST)

wood Essence

Formats

1220 x 185 x 10,5 mm
48 1/32 x 7 9/32 x 13/32"
1830 x 185 x 11,5 mm
72 x 7 1/4 x 1/2"



Wood Essence offers the beauty of long plank wood looks with a multilayered structure composed by cork that provides a higher standard in terms of stability, performance and walking comfort. The 3,2mm cork top layer will provide an exceptional thermal and acoustic insulation and a natural look and feel.



Dapple Oak



D8G2001
Washed Haze Oak 4M
 80001501
 1830 x 185 x 11,5mm



D8F6001
Prime Artic Oak 4M
 80001484
 1830 x 185 x 11,5mm



D8F5001
Prime Desert Oak 4M
 80001481
 1830 x 185 x 11,5mm



D8F5002
Prime Desert Oak
 80001482
 1220 x 185 x 10,5mm



D8G1001
Washed Arcaine Oak 4M
 80001498
 1830x185 x 11,5mm



D8G1002
Washed Arcaine Oak
 80001499
 1220 x 185 x 10,5mm



D8F1001
Dapple Oak 4M
 80001469
 1830x185 x 11,5mm





D8G4001

Washed Castle Oak 4M
80001506
1830x185 x 11,5mm



D8G4002

Washed Castle Oak
80001507
1220 x 185 x 10,5mm



D886003

Platinum Chalk Oak 4M
80001446
1830x185 x 11,5mm



D885003

Nebraska Rustic Pine 4M
80001444
1830x185 x 11,5mm





Nebraska Rustic Pine



D8G3001

Washed Highland Oak 4M
80001503
1830x185 x 11,5mm



D8G3002

Washed Highland Oak
80001504
1220 x 185 x 10,5mm



D887004

Ivory Chalk Oak 4M
80001449
1830x185 x 11,5mm



Washed Highland Oak



D8H6001

Classic Nordic Pine *

80001509

1830x185 x 11,5mm



D8F4001

Classic Prime Oak

80001477

1830x185 x 11,5mm



D8F4002

Classic Prime Oak

80001478

1220 x 185 x 10,5mm



D8F7001

Golden Prime Oak

80001487

1830x185 x 11,5mm



Rustic Forest Oak



D8F7002
Golden Prime Oak
80001488
1220 x 185 x 10,5mm



D884004
Prime Rustic Oak 4M
80001441
1830x185 x 11,5mm



D8G0001
Rustic Forest Oak 4M
80001495
1830x185 x 11,5mm



D8F8001
Country Prime Oak 4M
80001490
1830x185 x 11,5mm



D8F9001
Rustic Eloquent Oak 4M
80001492
1830x185 x 11,5mm





D8H8001

Classic Sucupira 4M

80001511

1830x185 x 11,5mm



D8H7001

Classic Walnut 4M

80001510

1830x185 x 11,5mm



D8F3001

Nebula Oak 4M

80001474

1830x185 x 11,5mm



D8F2001

Coal Oak 4M

80001472

1830x185 x 11,5mm

Classic Walnut

Technical solution


PROTECTIVE SURFACE

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK

HDF – HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY

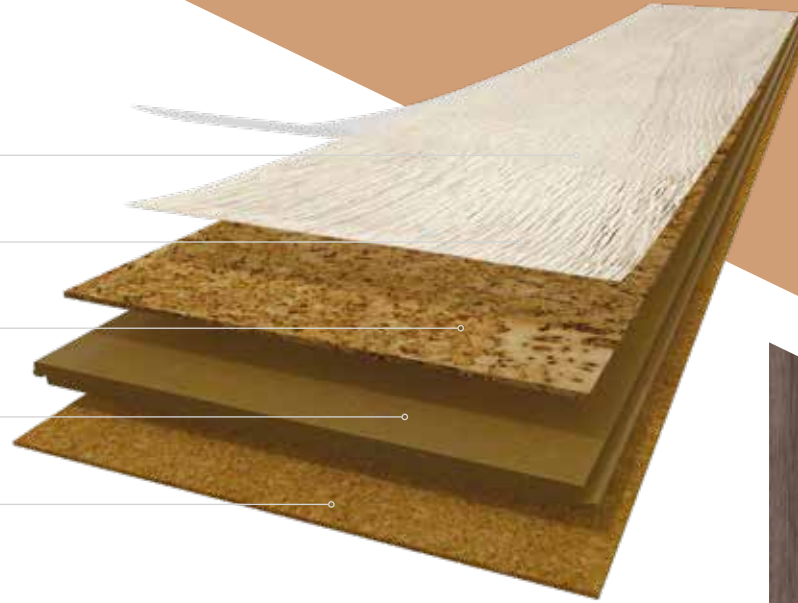

Finishing & Warranty



NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



Blue Angel is a voluntary certification that follows strict environmental standards and is recognized as a reference guide for a more sustainable way of life. Blue Angel is synonymous with a product (or service) that meets strict environmental performance criteria, such as being PVC-free.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



7 POINTS




wood **hydracork**

Formats 1225 x 195 x 6mm
48 7/32 x 7 11/16 x 1/4"

PressFit
Floating

Hydracork is a low thickness and waterproof floating solution that combines extreme performance with the comfort of cork. The innovative core made of composite cork is waterproof and incredibly stable, while its surface offers a wear resistance suitable for heavy commercial areas.

The product's low thickness makes it also the optimal choice for renovation projects. The revolutionary PressFit compression system allows for a fast and easy installation.

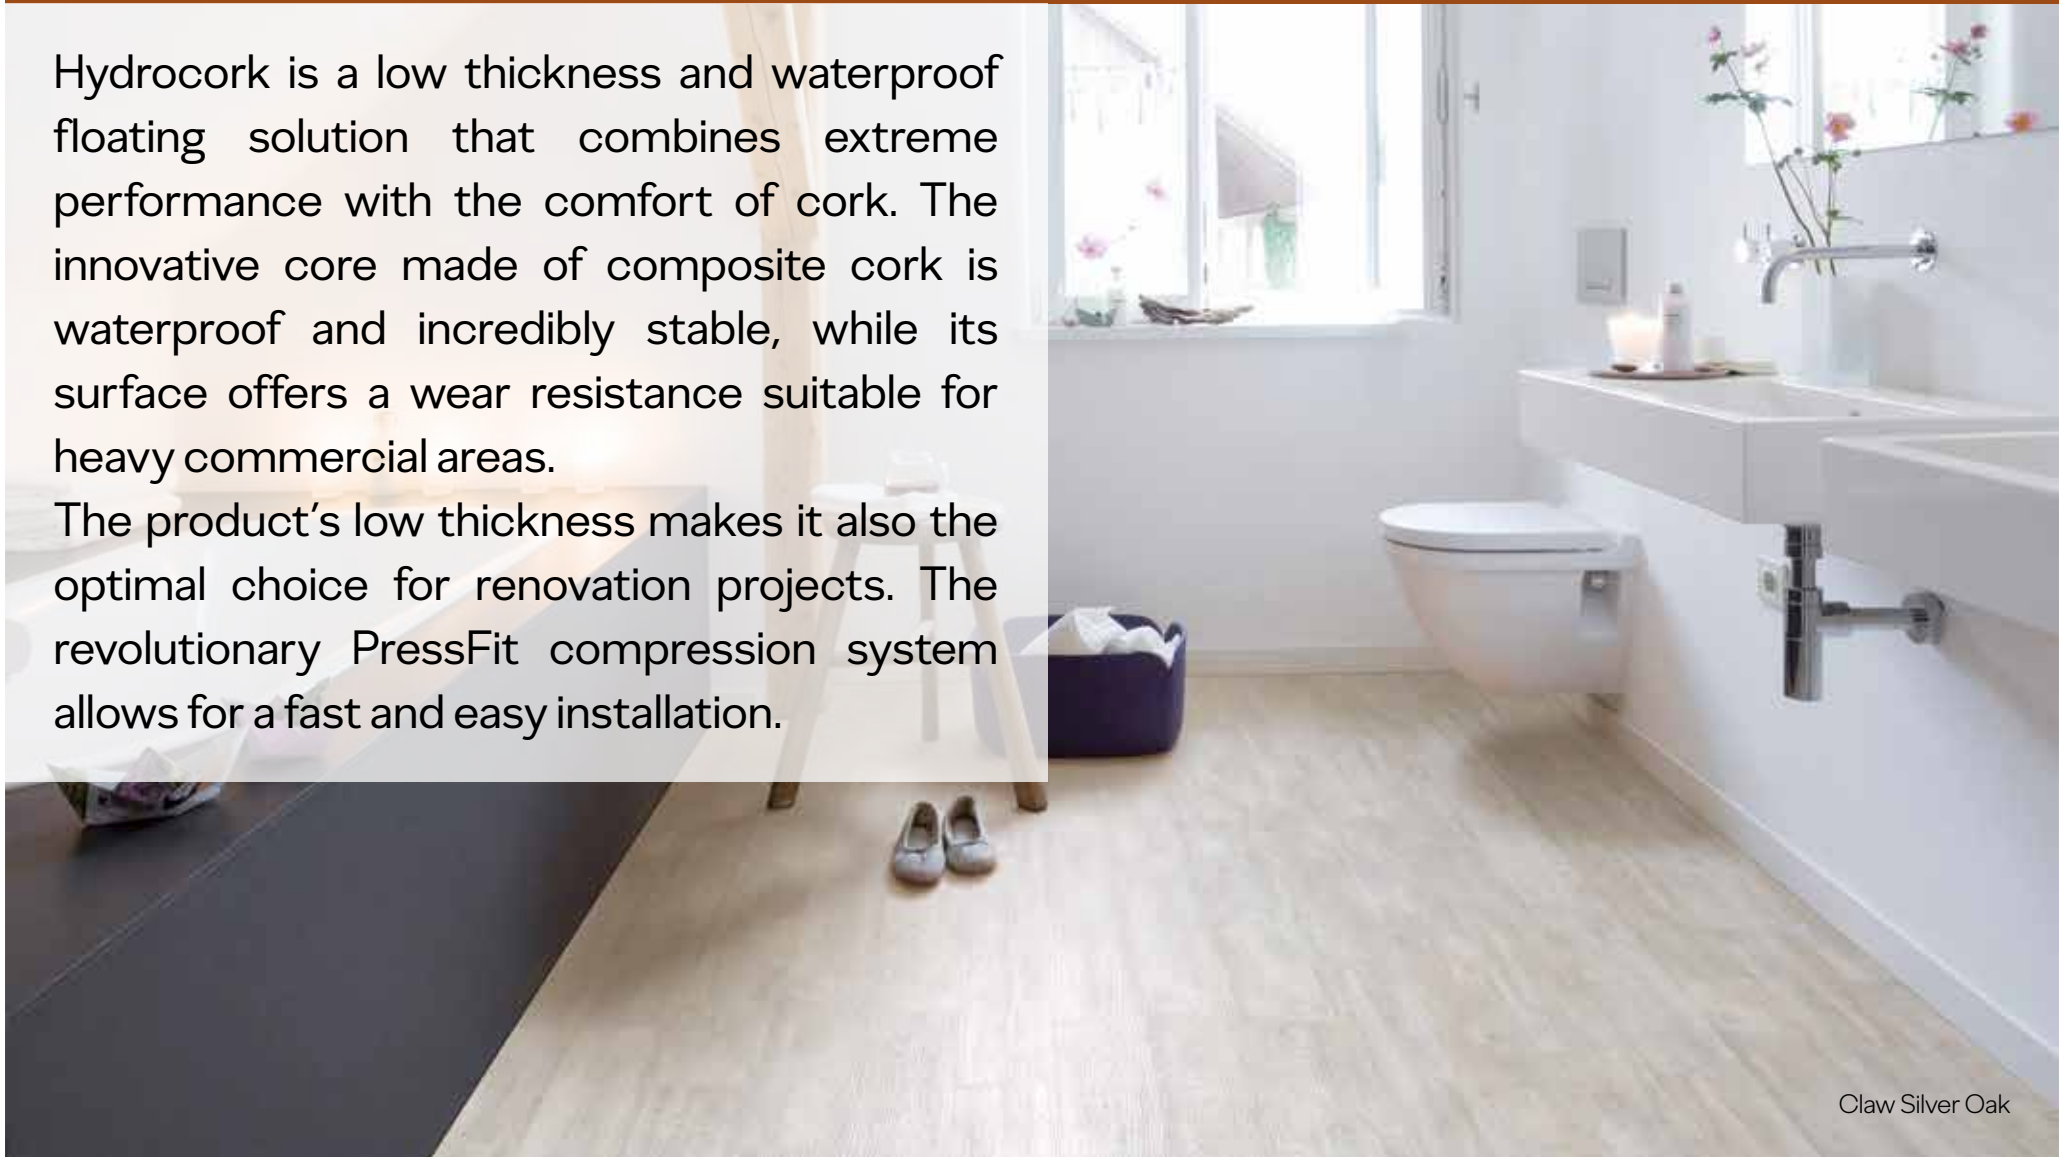

Claw Silver Oak



B5R0002

Linen Cherry 4M

80000642

1225x195 x 6mm



B5WR001

Wheat Oak 4M

80000665

1225x195 x 6mm



B5V3003

Claw Silver Oak 4M

80000661

1225x195 x 6mm

Hydrocork wood visuals will endure the test of time and make any space feel more welcoming.

Whether you choose a traditional or contemporary look, Hydrocork will provide the perfect solution to match your design style.



B5T7002

Limed Grey Oak 4M

80000656

1225x195 x 6mm



B5T0002

Light Beech 4M

80000652

1225x195 x 6mm



B5R1002

Sand Oak 4M

80000644

1225x195 x 6mm



B5R3002

Wheat Pine 4M

80000646

1225x195 x 6mm



4 sides beveled



B5P3002

Sawn Bisque Oak 4M

80000624

1225x195 x 6mm



B5P2002

Sawn Twine Oak 4M

80000622

1225x195 x 6mm



B5WS001

Light Dawn Oak 4M

80000666

1225x195 x 6mm



B5Q0002

Alaska Oak 4M

80000636

1225x195 x 6mm



Alaska Oak



B5P0002

Castle Raffia Oak 4M

80000618

1225x195 x 6mm



B5P4003

Arcadian Soya Pine 4M

80000627

1225x195 x 6mm



Castle Raffia Oak



Sylvan Gold Oak



B5P5003
Arcadian Rye Pine 4M
80000630
1225x195 x 6mm



B5Q1002
Chalk Oak 4M
80000638
1225x195 x 6mm



B5Q2002
European Oak 4M
80000640
1225x195 x 6mm



B5T5002
Nature Oak 4M
80000654
1225x195 x 6mm



B5R4002
Elegant Oak 4M
80000648
1225x195 x 6mm



B5L8001
Sylvan Gold Oak 4M
80000616
1225x195 x 6mm



B5P1002
Castle Toast Oak 4M
80000620
1225x195 x 6mm





B5WQ001

Sylvan Brown Oak



80000664

1225x195 x 6mm



Century Fawn Pine



B5WU001

Rustic Fawn Oak



80000668

1225x195 x 6mm



B5P7002

Century Fawn Pine



80000634

1225x195 x 6mm





Rustic Fawn Oak



B5WT001

Arcadian Artic Pine

80000667

1225x195 x 6mm



B5R7002

Cinder Oak

80000650

1225x195 x 6mm



Arcadian Artic Pine

wood Hydrocork



B5WV001

Rustic Grey Oak 4M

80000669

1225x195 x 6mm



B5P6002

Century Morocco Pine 4M

80000632

1225x195 x 6mm



Century Morocco Pine

Technical solution


PROTECTIVE WEAR LAYER

HIGH RESOLUTION DECORATIVE

SOLID VINYL LAYER

AGGLOMERATED CORK COMPOSITE CORE WITH PRESSFIT 3MM

BALANCING VINYL LAYER

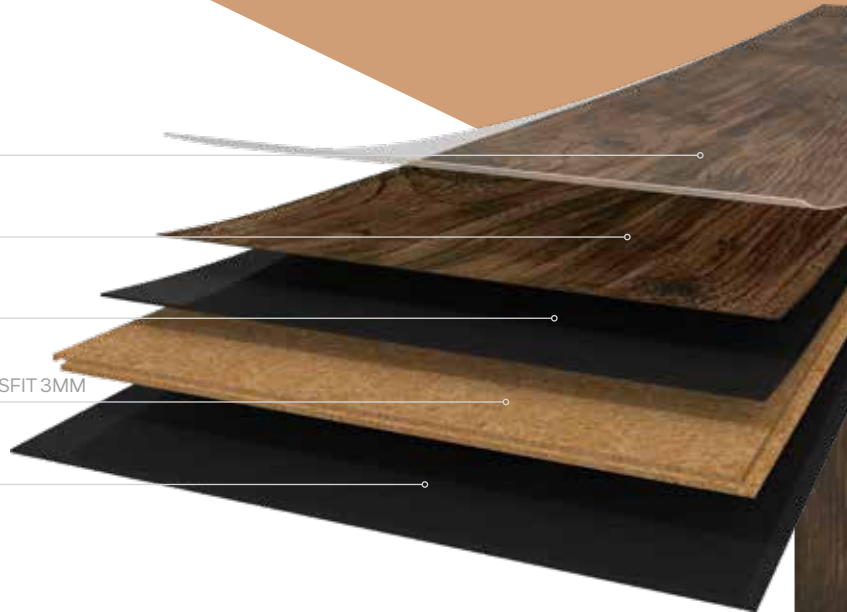

Finishing & Warranty



Suitable for heavy traffic residential areas and heavy traffic commercial areas.



*Please see the terms and conditions of Wicanders Limited Warranty on the website.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



As of January 2012, France has adopted regulations that limit total VOC emissions of building products. Manufacturers, selling their products in France must obtain a classification ranging from A+ (very low emissions) to C (high emissions). The declared goal is to improve indoor air quality in private/ commercial buildings.



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



An Environmental Product Declaration is a verified document that reports environmental data of products based on life cycle assessment and other relevant information in accordance with the international standard ISO 14025.



In 2003 Japan has adopted regulations that limit formaldehyde emissions of buildings products, in order to improve indoor air quality. So that products can be sold in Japan, they must have the classification ranging from F4 stars (extremely low emissions) to F3 stars (low emissions), but in this case with some restrictions.



2 POINTS



2 POINTS (UPON REQUEST)

Technical Data Sheet

Technical Data Sheet	Standard	Unit	wood Go	wood Infitus	wood Resist ECO
Dimension (LxWxT)	-	mm	1220x185x10,5	1840x220x8	1220x185x10,5mm
Mass per unit	-	Kgs / m ²	9,80	11,6	8,37
Packaging (box / pallet)	-	m ²	1,806 / 79,464	2,429 / 77,728	1,806 / 72,240
Level of use Domestic	ISO 10874	Class	23	23	23
Level of use Commercial	ISO 10874	Class	32	33	33
General properties - EN 16511					
Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm ²	Complies	Complies	Complies
Length, l	ISO 24337	≤ 1500 mm: $\Delta l \leq 0,5$ mm / > 1500 mm: $\Delta l \leq 0,3$ mm/m	Complies	Complies	Complies
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies	Complies	Complies
Squareness, q	ISO 24337	$max \leq 0,20$ mm	Complies	Complies	Complies
Straightness, s	ISO 24337	$max \leq 0,30$ mm/m	Complies	Complies	Complies
Openings, o	ISO 24337	$max \leq 0,20$ mm	Complies	Complies	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ %, / convex $\leq 1,0$ %	Complies	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ %, / convex $\leq 0,20$ %	Complies	Complies	Complies
Classification properties - EN 16511					
Wear resistance IP	EN 15468, procedure B	$\geq 5 000$ cycles	-	Complies	Complies
	EN 15468 - annex A	$\geq 1 500$ cycles	Complies	-	-
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	$\geq 1 600$ mm	-	Complies	Complies
		≥ 800 mm	Complies	-	-
Castor chair resistance	EN 425	25 000 cycles	Complies	Complies	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 / Group 3: grade 4	Complies	Complies	Complies
Residual Indentation	EN ISO 24343-1	$\leq 0,2$ mm	-	Complies	Complies
		$\leq 0,3$ mm	Complies	-	-
Swelling	ISO 24336	%	-	0%	-
		≤ 18 %	-	-	Complies
		≤ 20 %	Complies	-	-
Locking system	ISO 24334	KN/m	-	Complies	-
Micro-scratch	EN 16094	\leq MSR-A2	-	Complies	-
Dimensional Stability (heat conditions)	ISO 23999	$\leq 0,25$ %	-	Complies	-
Safety properties - EN 14041					
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Bfl-s1	Bfl-s1	Efl-s1
Thermal resistance	EN 12667:2001	(m ² K)/W	-	0,0399	-
Slip Classification	EN 13893	Class	DS	DS	DS
Slip Resistance	DIN 51130	Class	-	R9	-
Formaldehyde emission	EN 717-1	Class	E1	E1	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable	Undetectable	Undetectable
Electrical behaviour	EN 1815	kV	-	-	Not antistatic
Additional properties					
Impact sound reduction	EN ISO 10140	dB (ΔL_w)	16	15	17
Thermal resistance (Thermal conductivity)	EN ISO 10456	m ² ·K/W	-	-	0,1
	EN 12667	m ² ·K/W	R <0,112	-	-

Technical Data Sheet	Standard	Unit	wood Resist	wood Essence	wood Hydrocork
Dimension (LxWxT)	-	-	1220x185x10,5mm	1220x185x10,5mm / 1830x185x11,5mm	1225 x 195 x 6mm
Mass per unit	-	Kgs / m ²	9,8	9,72 - 1830x185mm / 8,62 - 1220x185mm	8,12
Packaging (box / pallet)	-	m ²	1,806 / 72,240	2,031 / 89,364 - 1830x185mm / 1,806 / 79,464 - 1220x185mm	1,672 / 93,632
Level of use Domestic	ISO 10874	Class	23	23	23
Level of use Commercial	ISO 10874	Class	33	32	33
General properties - EN 16511					
Thickness, t -	ISO 24337	$\Delta t_{avg} \leq 0,50$ mm, relative to nominal value / $t_{max} - t_{min} \leq 0,50$ mm	Complies	-	Complies
	EN ISO 24346	$\pm 0,25$	-	Complies	-
Length, l	ISO 24337	≤ 1500 mm: $\Delta l \leq 0,5$ mm / > 1500 mm: $\Delta l \leq 0,3$ mm/m	Complies	-	Complies
	EN ISO 24342	+/- 0.5%	-	Complies	-
Width, w	ISO 24337	$\Delta w_{avg} \leq 0,10$ mm, relative to nominal value / $w_{max} - w_{min} \leq 0,20$ mm	Complies	-	Complies
	EN ISO 24342	+/- 0.10%	-	Complies	-
Squareness, q	ISO 24337	$\max \leq 0,20$ mm	Complies	-	Complies
	EN ISO 24342	$< 0,2$	-	Complies	-
Straightness, s	ISO 24337	$\max \leq 0,30$ mm/m	Complies	-	Complies
	EN ISO 24342	$\leq 0,30$	-	Complies	-
Openings, o	ISO 24337	$\max \leq 0,20$ mm	Complies	Complies	Complies
Height difference, h	ISO 24337	$h_{max} \leq 0,15$ mm	Complies	Complies	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave $\leq 0,50$ % / convex $\leq 1,0$ %	Complies	Complies	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave $\leq 0,15$ % / convex $\leq 0,20$ %	Complies	Complies	Complies
Dimensional Stability	ISO 20326 (Anex C)	$\leq 0,25$ %	-	Complies	-
Classification properties - EN 16511					
Wear resistance IP	EN 15468, procedure B	≥ 5000 cycles	Complies	-	Complies
	EN 14354 (Annex D)	≥ 5000 cycles	-	Complies	-
Impact resistance [mm] (big ball)	EN 13329:2006+A1:2008, Annex F	≥ 1600 mm	Complies	-	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies	Complies	Complies
Resistance to staining	EN 438-2	Groups 1 and 2: grade 5 / Group 3: grade 4	Complies	-	Complies
Residual Indentation	EN ISO 24343-1	$\leq 0,2$ mm	Complies	-	Complies
		$\leq 0,3$ mm	-	Complies	-
Swelling	ISO 24336	≤ 18 %	Complies	Complies	Complies
Locking system	ISO 24334	Long side ≥ 1 KN/m / Short side ≥ 2 KN/m	-	Complies	-
Dimensional Stability (heat conditions)	ISO 23999	$\leq 0,25$ %	-	-	Complies
Safety properties - EN 14041					
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	Bfl-s2	Cfl-s1	Bfl-s1
Slip Classification	EN 13893	Class	DS	DS	DS
Formaldehyde emission	EN 717-1	Class	E1	E1	E1
Electrical behaviour	EN 1815	kV	Antistatic	-	Not antistatic
Content pentachlorophenol (PCP)	EN 14041 - Annex B	mg/kg	Undetectable	Undetectable	Undetectable
Additional properties					
Impact sound reduction	EN ISO 10140	dB (ΔL_w)	16	16	16
Walking noise	IHD-W431	dB %	Reduction improvement 11,4 dB Difference of loudness 45,4%	13,2 51,6	Difference of loudness 12,2dB Reduction improvement 42,0%
Thermal resistance (Thermal conductivity)	EN ISO 10456	m ² K/W	0,093	R $\leq 0,150$	0,05



stone

Our performance.

Your comfort.

stone Essence

Formats 905 x 295 x 10,5 mm
35 5/8 x 11 5/8 x 3/8"



Floating floor with a multilayered structure composed by the unmatched properties of cork combined with the beauty of selected stone visuals gives to this solution a natural look and feel. The 3,2mm cork top layer will provide an exceptional performance matched with a thermal and acoustic insulation, as well as a superior walking comfort and a warm atmosphere year round.




Concrete Nordic



D89D001
Concrete Nordic
80001460
905x295 x 10,5mm



D88Z001
Beton Nordic
80001452
905x295 x 10,5mm

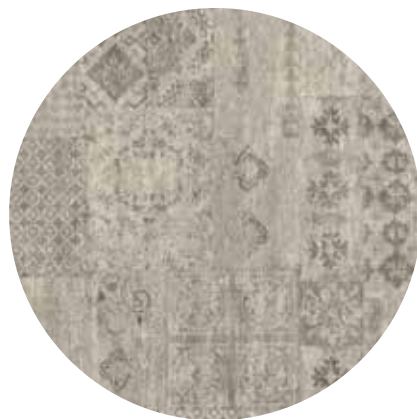

D89H001
Azulejo Sand
80001464
905x295 x 10,5mm



D89E001
Concrete Urban
80001461
905x295 x 10,5mm



D89I001
Azulejo Cityzen
80001465
905x295 x 10,5mm



D89A001
Beton Urban *
80001457
905x295 x 10,5mm



D89J001
Azulejo Forest
80001466
905x295 x 10,5mm



D89F001
Concrete Corten
80001462
905x295 x 10,5mm



D89B001

Beton Corten *

80001458

905x295 x 10,5mm



D89K001

Azulejo Cellar

80001467

905x295 x 10,5mm



Azulejo Cellar



D89G001

Concrete Midnight

80001463

905x295 x 10,5mm



D89C001

Beton Midnight *

80001459

905x295 x 10,5mm



Beton Corten

Technical solution


PROTECTIVE SURFACE

HIGH RESOLUTION IMAGE

AGGLOMERATED CORK 3,2MM

HDF - HIGH DENSITY FIBERBOARD WITH CORKLOC

INTEGRATED CORK UNDERLAY 1,2MM

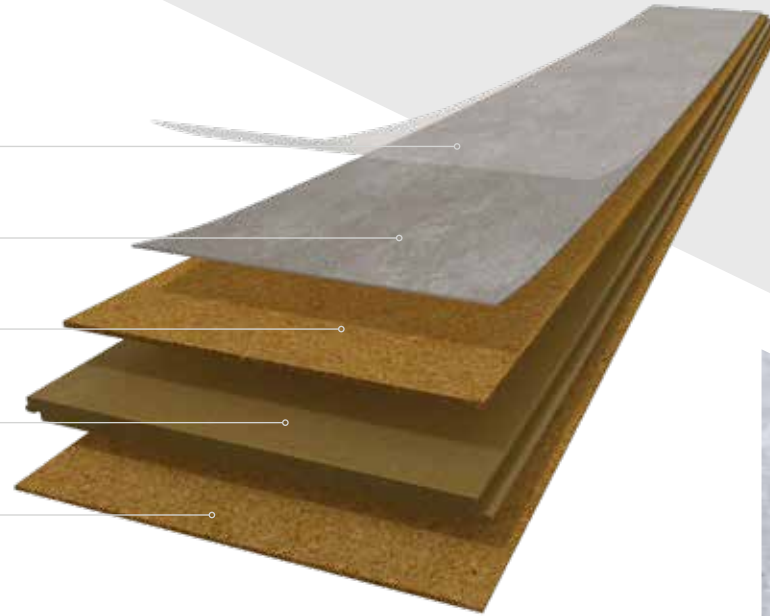

Finishing & Warranty



NPC surface finish (Natural Power Coat) is the last innovation in varnished cork floors being suitable for the most demanding domestic areas and commercial areas with moderate traffic, achieving a class of 32 (ISO 10874) and AC6 (EN 13329). This green coat also has a very pleasant haptic, which emphasizes the warmth and natural structure of cork.



CE marking is a certification mark that indicates conformity with health, safety and environmental protection standards for products sold within the European Economic Area (EEA).



TÜV-PROFICERT is a transnational certificate for VOC-emissions and air quality, certifying that a product complies with different national regulations, such as AgBB, Belgian VOC regulation, Finnish M1 classification, BREEAM Exemplary Level, LEED v4 (outside North America), RAL-UZ 120 and Austrian Eco Label (Guideline UZ 56).



Blue Angel is a voluntary certification that follows strict environmental standards and is recognized as a reference guide for a more sustainable way of life. Blue Angel is synonymous with a product (or service) that meets strict environmental performance criteria, such as being PVC-free.



Greenguard certification identifies products that have low chemical emissions, improving the indoor air quality. The GOLD certification ensures that a product is acceptable for use in environments such as schools and healthcare facilities.



In 2003 Japan has adopted regulations that limit formaldehyde emissions of buildings products, in order to improve indoor air quality. So that products can be sold in Japan, they must have the classification ranging from F4 stars (extremely low emissions) to F3 stars (low emissions), but in this case with some restrictions.



Technical Data Sheet

	Standard	Unit	stone Essence
Dimension (LxWxT)	-	-	905x295x10,5mm
Mass per unit	-	Kgs / m ²	7,11
Packaging (box / pallet)	-	m ²	2,136 / 76,896
Level of use Domestic	ISO 10874	Class	23
Level of use Commercial	ISO 10874	Class	32
General properties - EN 12104 - EN 20326			
Thickness, t -	EN ISO 24346	± 0,25	Complies
Length, l	EN ISO 24342	+/- 0.5%	Complies
Width, w	EN ISO 24342	+/- 0.10%	Complies
Squareness, q	EN ISO 24342	< 0.2	Complies
Straightness, s	EN ISO 24342	≤ 0,30	Complies
Openings, o	ISO 24337	max ≤ 0,20 mm	Complies
Height difference, h	ISO 24337	hmax ≤ 0,15 mm	Complies
Flatness of the panel (Length - concave / convex)	ISO 24337	concave ≤ 0,50 %, / convex ≤ 1,0 %	Complies
Flatness of the panel (Width - concave / convex)	ISO 24337	concave ≤ 0,15 %, / convex ≤ 0,20 %	Complies
Dimensional Stability	ISO 20326 (Anex C)	≤ 0,25 %	Complies
Classification properties - EN 12104 - EN 20326			
Wear resistance IP	EN 14354 (Annex D)	≥ 5 0000 cycles	Complies
Castor chair resistance	EN 425	25 000 cycles	Complies
Residual Indentation	EN ISO 24343-1	≤ 0,3 mm	Complies
Swelling	ISO 24336	≤ 18%	Complies
Locking system	ISO 24334	Long side ≥ 1KN/m Short side ≥ 2 KN/m	Complies
Safety properties - EN 14041			
Fire resistance	EN ISO 11925-2 + EN ISO 9239-1: Class EN 13501-1	Class	C fl-s1
Slip Classification	EN 13893	Class	DS
Formaldehyde emission	EN 717-1	Class	E1
Content pentachlorophenol (PCP)	EN 14041 Annex B	mg/kg	Undetectable
Additional properties			
Impact sound reduction	EN ISO 10140	dB (ΔLw)	16
Walking noise	IHD-W431	dB %	13,2 51,6
Thermal resistance (Thermal conductivity)	EN ISO 10456	m ² K/W	R ≤ 0,150

WICANDERS' Range

		LOOKS			
		cork	wood	stone	
RANGE	Go			-	
	Resist	-		-	
	<i>Infinitus</i>	-		-	
	Resist <small>ECO</small>	-		-	
	Essence				
	Hydrocork	-		-	

Heavy Traffic Residential areas

Moderate Traffic Commercial areas

Medium Traffic Commercial areas

Heavy Traffic Commercial areas

The sample images presented in this brochure are cut from larger pieces. Decor and shade may vary slightly.

Amorim Cork Flooring, S.A.

Rua do Ribeirinho 202 - P.O. Box 13

4536-907 S. Paio de Oleiros - Portugal

T. +351 22 747 56 00 E. info.acf@amorim.com



www.wicanders.com

DE	Amorim Deutschland GmbH	(+49) 4221 5 93-01	info.acf.de@amorim.com
BE NE LUX	Amorim Benelux B.V.	(+31) 166 604 111	info.acf.bnl@amorim.com
AT	Amorim Deutschland GmbH	(+43) 1 54 51 65 10	info.acf.at@amorim.com
CH	Amorim Flooring Switzerland AG	(+41) 41 726 20 20	info.acf.ch@amorim.com
PT	Amorim Cork Flooring, S.A.	(+351) 227 475 600	info.acf@amorim.com
ES	Amorim Cork Flooring, S.A.	(+351) 227 475 600	info.acf.es@amorim.com
FR	Amorim Cork Flooring, S.A.	(+33) 800 914 848	info.acf.fr@amorim.com
DK	Timberman Denmark A/S	(+45) 995 252 52	timberman@timberman.dk
PL	Dom Korkowy, Sp. z o.o.	(+48) 126 379 639	krakow@domkorkowy.pl
US	Amorim Flooring North America	(+1) 410 553 60 62	info.acf.us@amorim.com
RU	Amorim Flooring Rus, OOO	(+7) 495 280 7860	info.acf.ru@amorim.com
IT	Amorim Cork Flooring, S.A.	(+39) 068 635 7287	info.acf.it@amorim.com
FI	Korkkitrio Oy	(+358) 50 554 2616	wicandersmyynti@korkkitrio.fi
SW	Amorim Flooring Sweden	(+46) 311 077 40	info.acf.se@amorim.com



INVESTORS IN PEOPLE™
We invest in people Standard

AMORIM